

Load cell PR 6241, converter Connexx[®] and mounting kits PR 6041/PR 6043/PR 6044

For the precise weighing of process vessels



Digital Assistance
Technology



German Quality

The PR 6241 series compression S-type load cells are specially designed for weighing small and medium process vessels and for high-precision dosing. The PR 6241 is produced entirely from stainless steel. A special design feature is the combination of 'real' shearing force principle and pendulum support principle for the utmost precision.

The right solution for all of these applications:



Weighing



Filling and dosing



Fill quantity
control

Technical specifications

Load cell PR 6241						
Parameter	Description	Abbr.	D1	C3	C6	Unit
Accuracy class			0.04	0.015	0.008	%E _{max}
Minimum dead load	Lowest limit of specified measuring range	E _{min}	0	0	0	%E _{max}
Maximum capacity	Highest limit of specified measuring range	E _{max}	See Ordering information table			kg
Safe load limit	Maximum load without irreversible damage	E _{lim}	150	150	150	%E _{max}
Destructive load	Danger of mechanical destruction	E _d	> 300	> 300	> 300	%E _{max}
Minimum load cell verification interval (OIML) For NTEP, see separate table	Minimum load cell verification interval, v _{min} = E _{max} /Y	Y	5,000	14,000	20,000	
Deadload output return	Factor for deadload output return after load (DR=1/2*E _{max} /Z)	Z	1,000	3,000	8,000	
Rated output	Relative output at maximum capacity	C _n	2	2	2	mV/V
Tolerance on rated output	Permissible deviation from rated output	d _c	<0.25	<0.07	<0.07	%C _n
Zero output signal	Load cell output signal under unloaded condition	S _{min}	0±1.0	0±1.0	0±1.0	%C _n
Reproducibility	Max. change in load cell output for repeated loading	ε _R	<0.01	<0.005	<0.005	%C _n
Creep	Max. change of output signal at E _{max} for 30 min.	d _{cr}	<0.03	<0.015	<0.008	%C _n
Non-linearity	Max. deviation from best straight line through zero	d _{lin}	<0.03	<0.01	<0.01	%C _n
Hysteresis	Max. difference in LC output between loading and unloading	d _{hy}	<0.04	<0.015	<0.008	%C _n
Temperature effect on S _{min}	Max. change of S _{min} in B _T	TK _{Smin}	<0.028	<0.01	<0.007	%C _n /10 K
Temperature effect on C	Max. change of C in B _T	TK _C	<0.03	<0.01	<0.005	%C _n /10 K
Input impedance	Between supply terminals	R _{LC}	650 ± 6	650 ± 6	650 ± 6	Ω
Output impedance	Between measuring terminals	R _O	610 ± 1	610 ± 0.5	610 ± 0.5	Ω
Insulation impedance	Between measuring circuit and housing at 100 V _{DC}	R _{IS}	> 5,000×10 ⁶	> 5,000×10 ⁶	> 5,000×10 ⁶	Ω
Insulation voltage	Between circuit and housing (PR 6241/..E only)		500	500	500	V
Recommended supply voltage	To hold the specified performance	B _u	4...24	4...24	4...24	V
Max. supply voltage	Permissible for continuous operation without damage	U _{max}	28/(EX versions: 25)			V
Nominal ambient temp. range	To hold the specified performance	B _T	-10 ... +55	-10 ... +55	-10 ... +55	°C
Usable ambient temp. range	Permissible for continuous operation without damage	B _{Tu}	-40 ... +95	-40 ... +95	-40 ... +95	°C
Storage temperature range	Without electrical and mechanical stress	B _{Ti}	-40 ... +95	-40 ... +95	-40 ... +95	°C
Permissible eccentricity	Permissible displacement from nominal load line	S _{ex}	5	5	5	mm
Vibration resistance	Resistance against oscillations (IEC 68-2-6 Fc)		20 g, 100 h, 10...150 Hz			
Barometric pressure influence	Influence of barometric pressure on output	PK _{Smin}	<0.005	<0.0025	<0.0025	%C _n /kPa
Nominal deflection	Max. elastic deformation under maximum capacity	S _{nom}	< 0.3 for E _{max} < 5 t/<0.5 for E _{max} = 5 t			mm
Material (sensor)	Stainless steel 1.4542					
Protection class	PR 6241: IP68*/IP69 Connexx®: IP65/IP68**					
Cable	Length: 5 m Diameter: 5 mm Cross section: 4×0.35 mm ² Material cable sheath: TPE					
Bending radius	≥ 25 mm at fixed installation ≥ 75 mm at flexible installation					
Connexx®						
Nominal ambient temp. range	To hold the specified performance	B _T	-10 ... +40			°C
Usable temperature range	Permissible for continuous operation without damage	B _{Tu}	-30 ... +60			°C
Storage temperature range	Without electrical and mechanical stress	B _{Ti}	-30 ... +70			°C

* The load cell can be submerged in water at a depth of 1.5 m for 10,000 hours.

** The module can be submerged in water at a depth of 1.5 m for 100 hours.

NTEP classification PR 6241

NTEP			NTEP minimum load cell verification interval, v_{min}								
Maximum capacity	with OIML class	divisions n_{max}	100 kg	200 kg	300 kg	500 kg	1 t	2 t	3 t	5 t	Unit
Class III Multiple	D1	2,000	20	40	60	100	200	400	600	1,000	g
Class III Multiple	C3	5,000	--	14.3	21	36	71	143	214	357	g
Class III Multiple	C6	8,000	--	10	15	25	50	100	150	--	g
Class IIIL Multiple	D1	5,000	6.7	13.3	20	33	67	133	200	333	g
Class IIIL Multiple	C3	10,000	--	5	7.1	12	24	48	71	119	g
Class IIIL Multiple	C6	10,000	--	3	5	8	17	33	50	--	g

Mounting kits PR 6041/PR 6043/PR 6044

Maximum capacity of load cell PR 6241	Mounting kit/ accessories	Material	Description/ comments	Mounting screws	Installation height (mm)	Max. permissible horizontal force (kN)	Horizontal destructive force [kN]	Max. permissible lift-off force [kN]	Max. permissible vertical load without load cell
100 kg–500 kg	PR 6041/04N		Elastomeric bearing	M12	53	/	/	/	/
100 kg–2 t	PR 6041/30N	Electrogalvanised steel S235, passivated and sealed	Plate mounting kit	M8-5.8	92	/	/	/	/
	PR 6041/30S	Stainless steel 1.4301 (AISI 304)	Plate mounting kit	M8-A2-70		/	/	/	/
	PR 6043/30N	Electrogalvanised steel S235, passivated and sealed	MiniFLEXLOCK	M8-8.8		6	20	/	2 t
	PR 6043/30S	Stainless steel 1.4301 (AISI 304)	MiniFLEXLOCK	M8-A2-70		6	20	/	2 t
	PR 6044/00S		Plate mounting kit	M8-A2-70		/	/	10	2 t
	PR 6044/10S		MaxiFLEXLOCK	M8-A2-70		6	20	10	2 t
	PR 6041/51S		Platform base	/	44	/	/	/	/
	PR 6043/31S		Load disc kit	/	/	/	/	/	/
3 t–5 t	PR 6041/40N	Electrogalvanised steel S235, passivated and sealed	Plate mounting kit	M12-5.8	130	/	/	/	/
	PR 6041/40S	Stainless steel 1.4301 (AISI 304)	Plate mounting kit	M12-A2-70		/	/	/	/
	PR 6043/40N	Electrogalvanised steel S235, passivated and sealed	MiniFLEXLOCK	M12-8.8		18	50	/	5 t
	PR 6043/40S	Stainless steel 1.4301 (AISI 304)	MiniFLEXLOCK	M12-A2-70		18	50	/	5 t
	PR 6044/01S		Plate mounting kit	M12-A2-70		/	/	20	5 t
	PR 6044/11S		MaxiFLEXLOCK	M12-A2-70		18	50	20	5 t




Fitted with the converter Connexx®, the load cell Inteco® offers a whole host of possibilities:

- The digital version guarantees fast signalling times for reliable dosing processes.
- Thanks to the use of field bus communication, the cable junction box is no longer needed.
- The standard interface CANopen ensures straightforward installation and calibration.
- CANopen allows for extra-long communication paths of up to 200 m.
- Weight values can also be generated individually – per load cell – meaning that defective load cells can be identified more easily.


Technical diagrams

Compression S-type load cell PR 6241

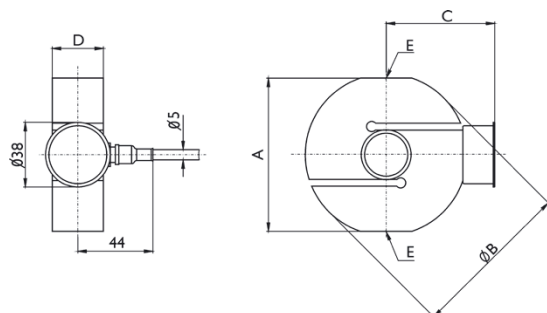


Model	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
PR 6241/12...52	60	65	50	23	M12
PR 6241/13...23	60	65	50	30	M12
PR 6241/33	90	95	64	30	M20×1.5
PR 6241/53	90	95	64	35	M20×1.5

Converter Connexx®

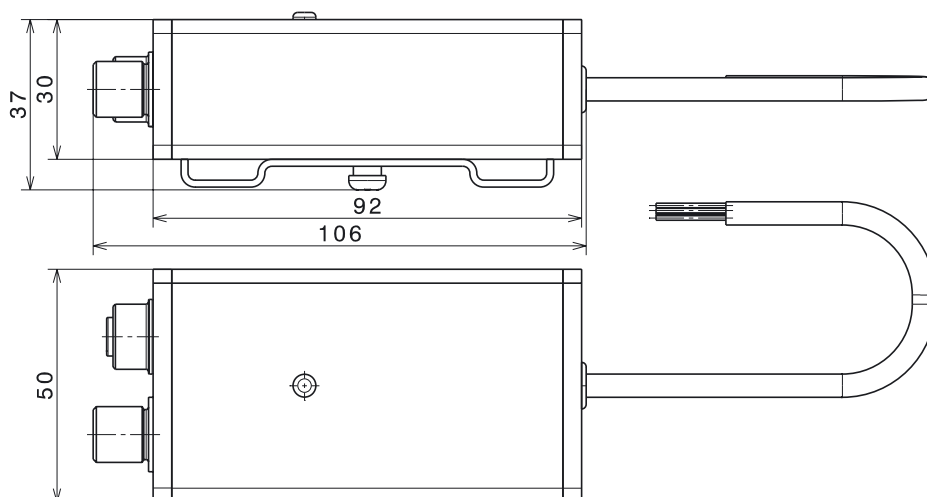

Converter Connexx®

Mounting kits PR 6041/PR 6043/PR 6044

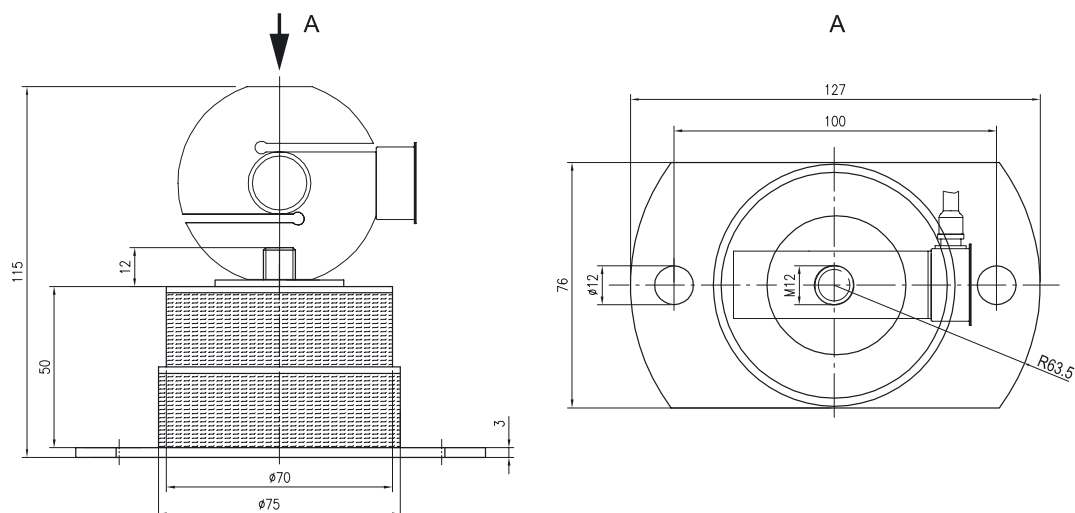

Elastomeric bearing PR 6041/04N

All dimensions in mm

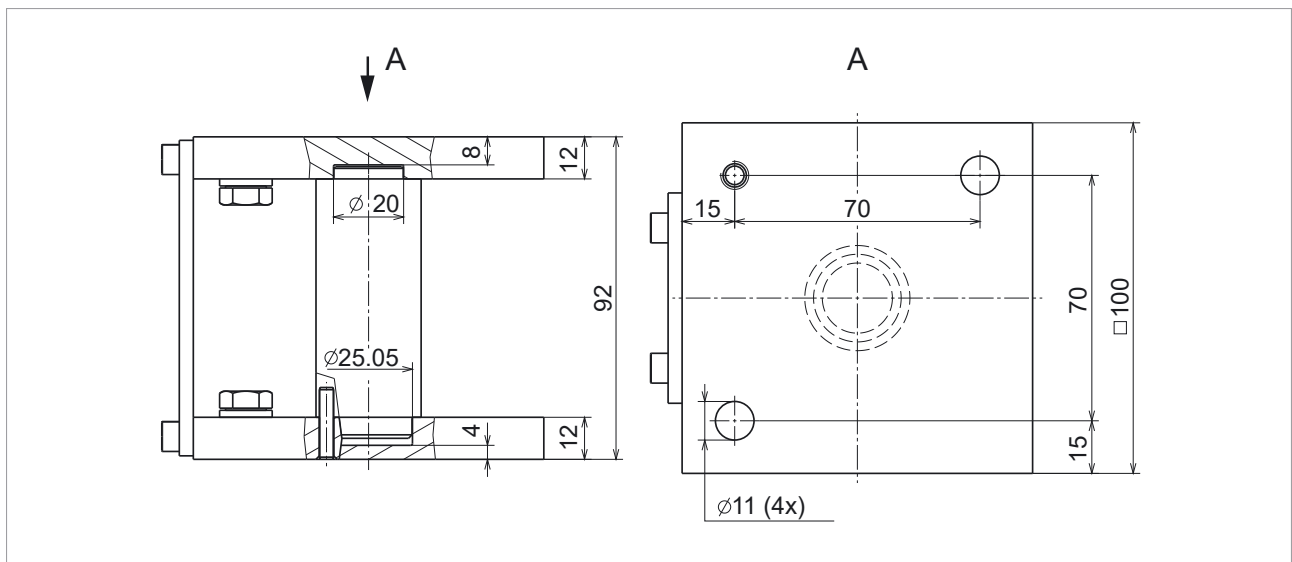


Plate mounting kit PR 6041/30N+S



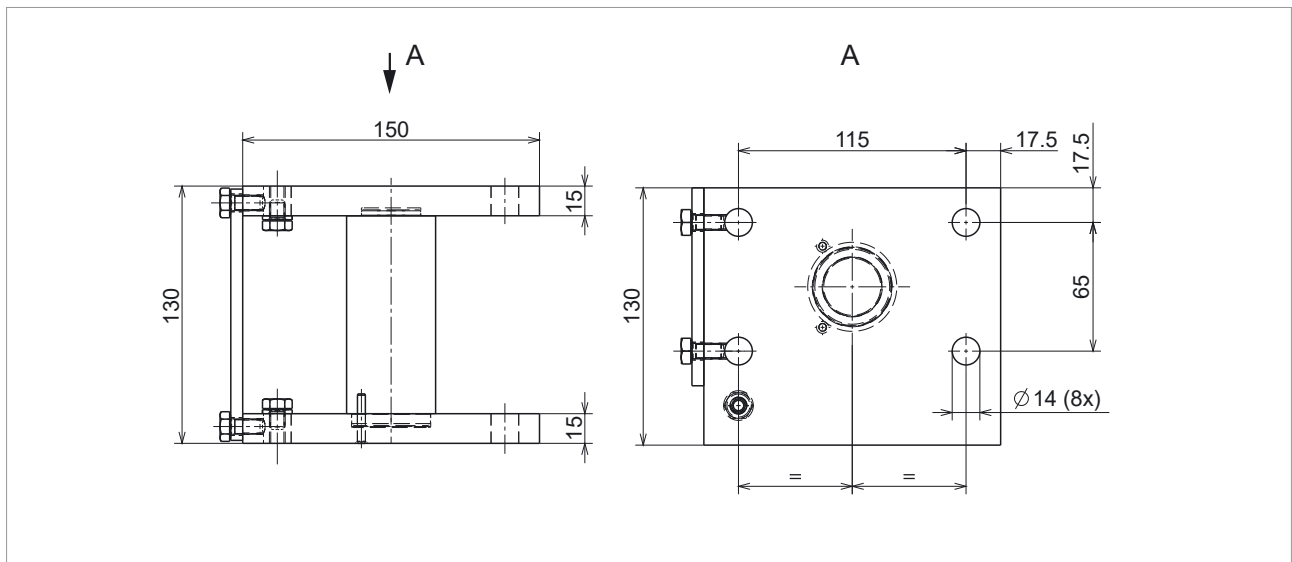



Plate mounting kit PR 6041/40N+S

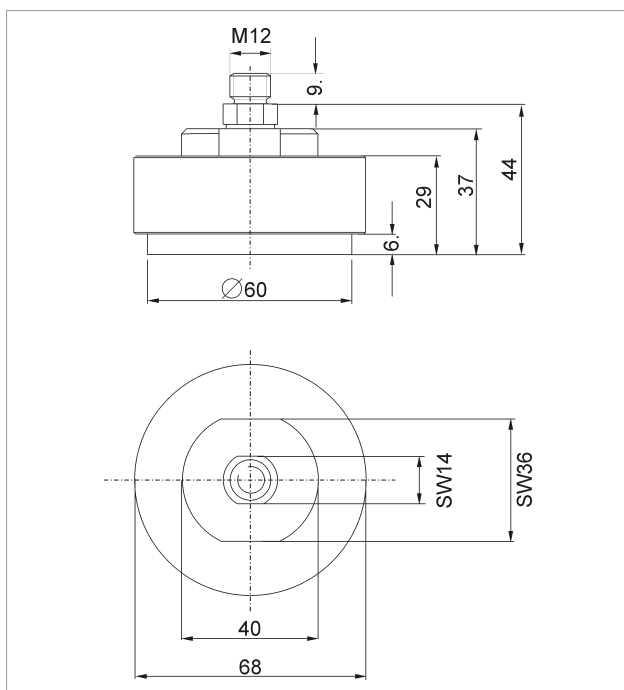

Platform base PR 6041/51

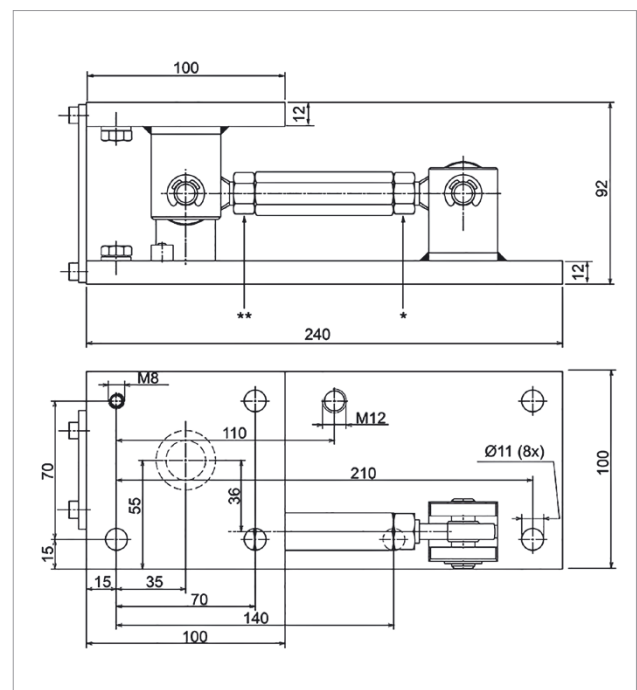

MiniFLEXLOCK PR 6043/30N+S

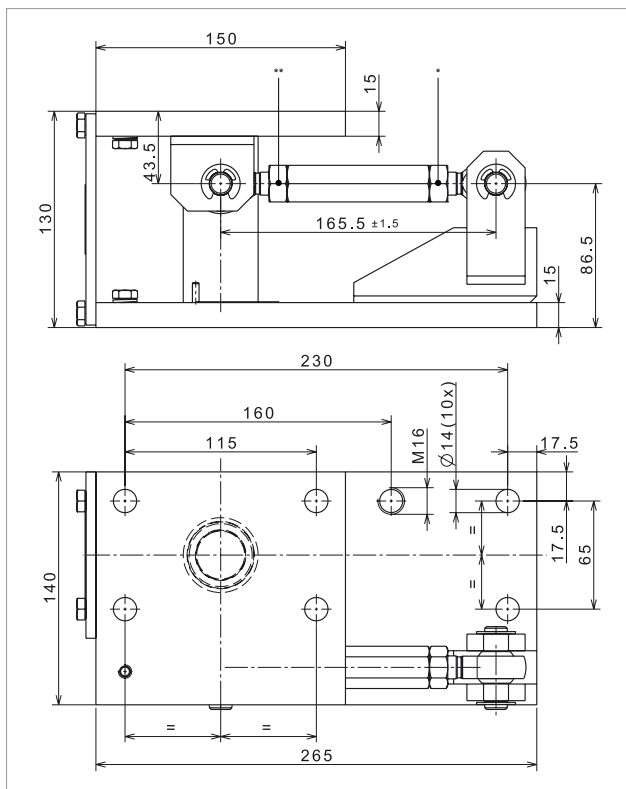

MiniFLEXLOCK PR 6043/40N+S

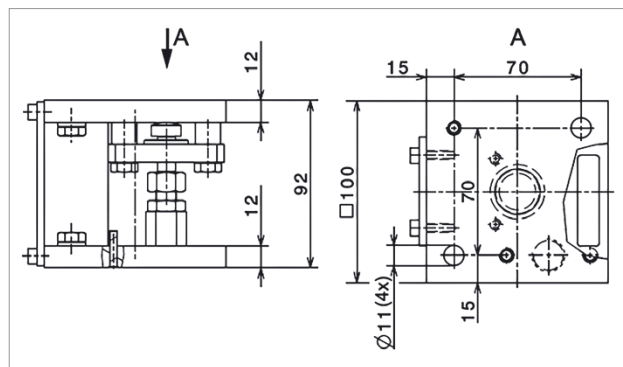


Plate mounting kit PR 6044/00S



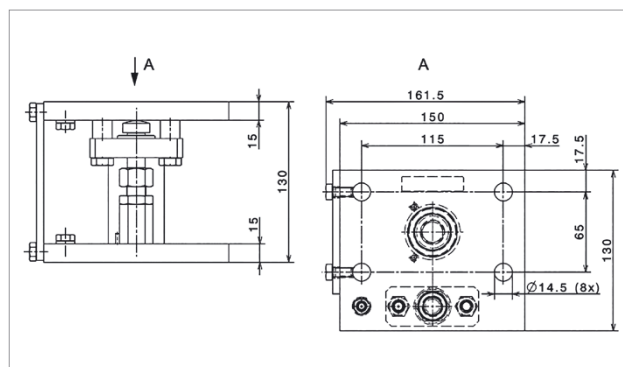


Plate mounting kit PR 6044/01S

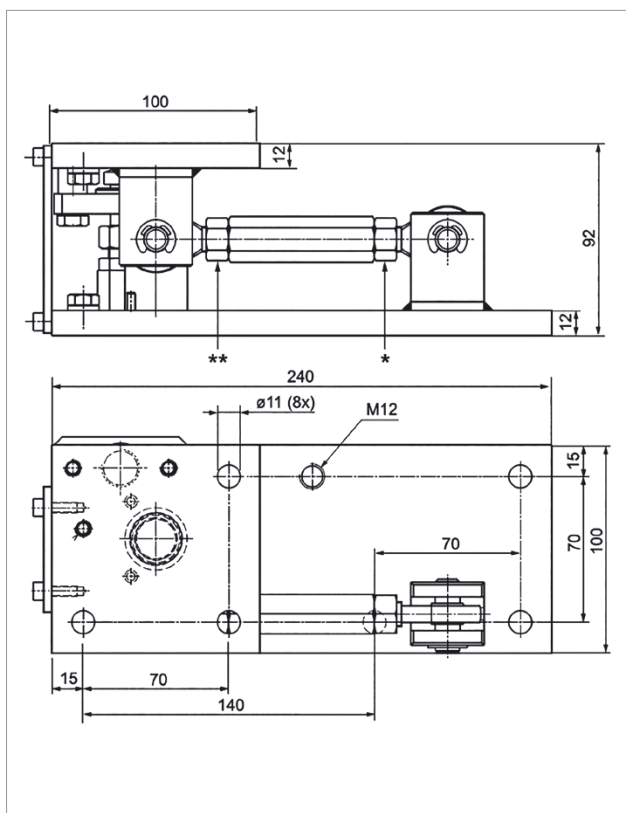

MaxiFLEXLOCK PR 6044/10S

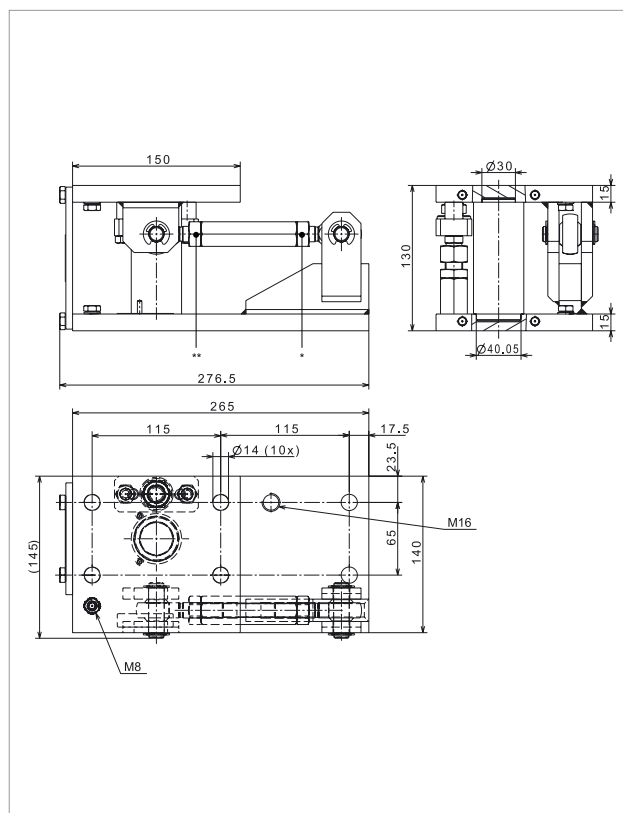

MaxiFLEXLOCK PR 6044/11S

Ex approval

Scope of validity:

PR 6241 (100 kg...5 t)



Explosion protection

Certificates for compression S-type load cell PR 6241

Zone	Labelling	Certificate number	For
0 and 1	II 1G Ex ia IIC T6 Ga Ex ia IIC T6 Ga	BVS 16 ATEX E 005 IECEX BVS 16.0005	PR 6241/..E only
20 and 21	II 1D Ex ta IIIC T160 °C Da Ex ta IIIC T160°C Da	TÜV 03 ATEX 2301X IECEX TUN 17.0025X	all PR 6241 without /..E
2	II 3G Ex nA IIC T6 Gc	Manufacturer's declaration	all PR 6241 without /..E
22	II 3D Ex tc IIIC T85 °C Dc	Manufacturer's declaration	all PR 6241 without /..E
FMus	IS CL I, II, III, DIV 1, GP A, B, C, D, E, F, G Entity – 4012 101 5688 NI CL I, II, III, DIV 2, GP A, B, C, D, E, F, G NIFW – 4012 101 5688 T4A Ta= -30 °C to 70 °C; T5 Ta= -30 °C to 55 °C	FM17USO276	all PR 6241 without /..E
FMca	IS CL I, II, III, DIV 1, GP A, B, C, D, E, F, G Entity – 4012 101 5688 NI CL I, II, III, DIV 2, GP A, B, C, D, E, F, G NIFW – 4012 101 5688 T4A Ta= -30 °C to 70 °C; T5 Ta= -30 °C to 55 °C	FM17CA0138	all PR 6241 without /..E

Ordering information

Compression S-type load cells OIML R60, accuracy class D1 = 0.04%

Type	Maximum capacity	Order number
PR 6241/12D1	100 kg	940526241121
PR 6241/22D1	200 kg	940526241221
PR 6241/32D1	300 kg	940526241321
PR 6241/52D1	500 kg	940526241521
PR 6241/13D1	1 t	940526241131
PR 6241/23D1	2 t	940526241231
PR 6241/33D1	3 t	940526241331
PR 6241/53D1	5 t	940526241531

Compression S-type load cells OIML R60, accuracy class D1 = 0.04%, ex-version

Type	Maximum capacity	Order number
PR 6241/12D1E	100 kg	940566241121
PR 6241/22D1E	200 kg	940566241221
PR 6241/32D1E	300 kg	940566241321
PR 6241/52D1E	500 kg	940566241521
PR 6241/13D1E	1 t	940566241131
PR 6241/23D1E	2 t	940566241231
PR 6241/33D1E	3 t	940566241331
PR 6241/53D1E	5 t	940566241531

Precision compression S-type load cells OIML R60, accuracy class C3 = 0.015%

Type	Maximum capacity	Order number
PR 6241/22C3	200 kg	940526241227
PR 6241/32C3	300 kg	940526241327
PR 6241/52C3	500 kg	940526241527
PR 6241/13C3	1 t	940526241137
PR 6241/23C3	2 t	940526241327
PR 6241/33C3	3 t	940526241337
PR 6241/53C3	5 t	940526241537

Precision compression S-type load cells OIML R60, accuracy class C3 = 0.015%, ex-version

Type	Maximum capacity	Order number
PR 6241/22C3E	200 kg	940566241227
PR 6241/32C3E	300 kg	940566241327
PR 6241/52C3E	500 kg	940566241527
PR 6241/13C3E	1 t	940566241137
PR 6241/23C3E	2 t	940566241327
PR 6241/33C3E	3 t	940566241337
PR 6241/53C3E	5 t	940566241537

Precision compression S-type load cells OIML R60, accuracy class C6 = 0.008%

Type	Maximum capacity	Order number
PR 6241/22C6	200 kg	940526241228
PR 6241/32C6	300 kg	940526241328
PR 6241/52C6	500 kg	940526241528
PR 6241/13C6	1 t	940526241138
PR 6241/23C6	2 t	940526241238
PR 6241/33C6	3 t	940526241338

Precision compression S-type load cells OIML R60, accuracy class C6 = 0.008%, ex-version

Type	Maximum capacity	Order number
PR 6241/22C6E	200 kg	940566241228
PR 6241/32C6E	300 kg	940566241328
PR 6241/52C6E	500 kg	940566241528
PR 6241/13C6E	1 t	940566241138
PR 6241/23C6E	2 t	940566241238
PR 6241/33C6E	3 t	940566241338

Precision compression S-type load cells OIML R60, converter Connexx®		
Type	Description	Order number
PR 6421/DIGITAL KIT	The converter Connexx® can only be ordered with the above-mentioned load cells from the PR 6421 series. When ordering, both order numbers need to be given.	940514100000

Additional information:

The converters Connexx® can be used with the Indicator X3.

To do this, the indicator X3 must be equipped with a CANopen interface card PR 5510/05 (940535510051).

Precision compression S-type load cells OIML R60, converter Connexx® – application sets		
Type	Description	Order number
PR 6154/03	Application set for 3 load cells. Includes: 2 × PR 6155/05, 1 × PR 6152/25, 1 × PR 6153/99	940536154031
PR 6154/04	Application set for 4 load cells. Includes: 3 × PR 6155/05, 1 × PR 6152/25, 1 × PR 6153/99	940536154041

Precision compression S-type load cells OIML R60, converter Connexx® – load cell accessories		
Type	Description	Order number
PR 6152/10	Connection cable between Connexx® and X3 (10 m)	940536152101
PR 6152/25	Connection cable between Connexx® and X3 (25 m)	940536152251
PR 6152/40	Connection cable between Connexx® and X3 (40 m)	940536152401
PR 6153/98	Divided cable gland	940536153981
PR 6153/99	Terminal resistor for Connexx®, M12	940536153991
PR 6155/05	Connection cable between Connexx® and Connexx® (5 m)	940536155051
PR 6155/10	Connection cable between Connexx® and Connexx® (10 m)	940536155101

Mounting kits PR 6041 without constrainer

Type	Order number
PR 6041/04N	940536041041
PR 6041/30N	940536041301
PR 6041/30S	940536041302
PR 6041/40N	940536041401
PR 6041/40S	940536041402
PR 6041/51S	940536041512

Mounting kits PR 6043 – MiniFLEXLOCK with integrated constrainer

Type	Order number
PR 6043/30N	940536043301
PR 6043/30S	940536043302
PR 6043/40N	940536043401
PR 6043/40S	940536043402

Mounting kits PR 6044 – MaxiFLEXLOCK with additional functions

Type	Order number
PR 6044/00S	940536044002
PR 6044/10S	940536044102
PR 6044/01S	940536044012
PR 6044/11S	940536044112

Mounting kits PR 6043 – load discs

Type	Order number
PR 6043/31S	940536043312

The products and solutions presented in this data sheet make major contributions in the following sectors:



Food
and beverages



Pharmaceutical



Chemistry



Cosmetics



Machinery
(OEM)

The technical data given serves as a product description only and should not be understood as guaranteed properties in the legal sense.

Specifications subject to change without notice.
Rev. 04/2020

Minebea Intec GmbH
Meiendorfer Straße 205 A
22145 Hamburg, Germany
Phone +49.40.67960.303
sales.hh@minebea-intec.com
www.minebea-intec.com